

3 Phases Voltage Indicator Pilot Light AD 30/W & RGY

NEW PROD

AD 30/W & RGY

Johannesburg Branch

MIMIC COMPONENTS

Cape Town Branch

Mimic Cape



Terminal type: Screw (for wire Max 1.5mm²)

Voltage between 2 phases: 380V $\pm$ 20%

Voltage between phase & neutral: 220V $\pm$ 20%

Frequency: 50/60Hz


Power frequency withstand voltage: 1890VAC 50Hz (between live part and contactable surface)

Torque: 0.8Nm


Operating temperature: -20°C ~ 55°C

Base Material: PA


Dimension

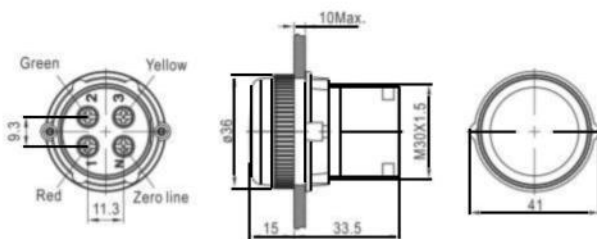



Hole Size




Gasket Size




Diagram





N + 1
live wire 2,3 shortage




N + 2
live wire 1,3 shortage




N + 3
live wire 1,2 shortage




N + 1 + 2
live wire 3 shortage



N + 1 + 3
live wire 2 shortage



N + 2 + 3
live wire 1 shortage



N + 1 + 2 + 3
3 phases normal

MIMIC COMPONENTS

5 Ramsay Street, Booysens 2091, Johannesburg

sales@mimic.co.za www.mimic.co.za

P.O. Box 38493, Booysens 2016, Johannesburg, South Africa

TEL: +27(0)11 689-5700